

ABM-IA-M2,5 - SW4 Abstandsbolzen




Merkmale

- 6-kant Abstandsbolzen
- Außengewinde: M2,5
- Innengewinde: M2,5
- Schlüsselweite (SW) 4
- Außengewinde mit Hinterstich nach DIN76
(kein Buchstabe „H“ in der Art.-Nr. bedeutet "ohne Hinterstich")
- Material: Messing vernickelt

Abmessungen

► Einheit = mm

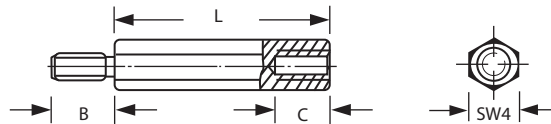

Art.-Nr.	L (mm)	B (mm)	C (mm)
099 11 05 HB3C3	5,0	3,0	3,0
099 11 05	5,0	6,0	2,5
099 11 05 HB6	5,0	6,0	2,5
099 11 06 H	6,0	6,0	4,0
099 11 07 H	7,0	6,0	4,0
099 11 08 H	8,0	6,0	5,0
099 11 09 H	9,0	6,0	5,0
099 11 10 HB5	10,0	5,0	6,0
099 11 10 HB5C7	10,0	5,0	7,0
099 11 10 H	10,0	6,0	6,5
099 11 11	11,0	6,0	6,0
099 11 11 H	11,0	6,0	6,0
099 11 12 HB6	12,0	6,0	6,0
099 11 13 H	13,0	6,0	6,0

Art.-Nr.	L (mm)	B (mm)	C (mm)
099 11 14 H	14,0	6,0	6,0
099 11 16 H	16,0	6,0	6,0
099 11 17 H	17,0	6,0	6,0
099 11 17 HB10	17,0	10,0	8,0
099 11 17 HB10C10	17,0	10,0	10,0
099 11 18	18,0	6,0	6,5
099 11 18 H	18,0	6,0	6,5
099 11 20 H	20,0	6,0	6,5
099 11 22 H	22,0	6,0	6,5
099 11 23 H	23,0	6,0	6,5
099 11 28 H	28,0	6,0	6,5
099 11 30 H	30,0	6,0	7,0
099 11 35 H	35,0	6,0	10,0
099 11 40 H	40,0	6,0	10,0

Weitere Abmessungen und Größen auf Anfrage, Tel.: 09852 61079-0



THORA
elektronik

www.thora.com