

AB-I-M3 - SW6 Abstandsbolzen




Merkmale

- 6-kant Abstandsbolzen mit 2 x Innengewinde M3
- Material: Polyamid 6.0 GV25, UL94HB
- Farbe: schwarz
- temperaturbeständig bis ca. +110 °C

Abmessungen

► Einheit = mm

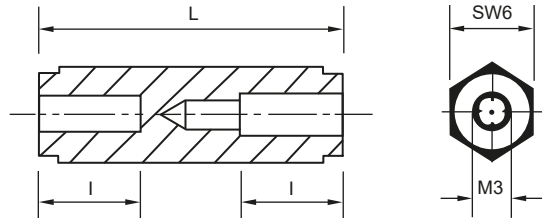

Art.-Nr.	L (mm)
100 22 03	3,0
100 22 04	4,0
100 22 05	5,0
100 22 06	6,0
100 22 07	7,0
100 22 08	8,0
100 22 09	9,0
100 22 10	10,0
100 22 11	11,0
100 22 12	12,0
100 22 13	13,0
100 22 14	14,0
100 22 15	15,0
100 22 16	16,0
100 22 17	17,0
100 22 18	18,0
100 22 19	19,0
100 22 20	20,0
100 22 21	21,0
100 22 22	22,0
100 22 23	23,0
100 22 24	24,0
100 22 25	25,0
100 22 26	26,0
100 22 27	27,0
100 22 28	28,0
100 22 29	29,0
100 22 30	30,0
100 22 31	31,0
100 22 32	32,0
100 22 33	33,0
100 22 34	34,0
100 22 35	35,0
100 22 36	36,0
100 22 37	37,0
100 22 38	38,0
100 22 39	39,0

Art.-Nr.	L (mm)
100 22 40	40,0
100 22 41	41,0
100 22 42	42,0
100 22 43	43,0
100 22 44	44,0
100 22 45	45,0
100 22 46	46,0
100 22 47	47,0
100 22 48	48,0
100 22 49	49,0
100 22 50	50,0
100 22 51	51,0
100 22 52	52,0
100 22 53	53,0
100 22 54	54,0
100 22 55	55,0
100 22 56	56,0
100 22 57	57,0
100 22 58	58,0
100 22 59	59,0
100 22 60	60,0
100 22 61	61,0
100 22 62	62,0
100 22 63	63,0
100 22 64	64,0
100 22 65	65,0
100 22 66	66,0
100 22 67	67,0
100 22 68	68,0
100 22 69	69,0
100 22 70	70,0
100 22 71	71,0
100 22 72	72,0
100 22 73	73,0
100 22 74	74,0
100 22 75	75,0



L	I	L	I	L	I
6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe
bis 15,0 mm	durchgehend	17,0 mm	8,0 mm	20,0 mm	9,5 mm
16,0 mm	7,5 mm	18,0 mm	8,5 mm	ab 21,0 mm	10,0 mm
		19,0 mm	9,0 mm		

Weitere Abmessungen und Größen auf Anfrage, Tel.: 09852 61079-0



THORA
elektronik

www.thora.com