

# AB-IR-M3-1,8 - SW6 Abstandsbolzen




### Merkmale

- einseitig mit Innengewinde M3
- einseitig mit Rastverriegelung für Leiterplattenstärke 1,6 mm
- Loch-Ø = 4,0 mm
- Material: Polyamid 6.6, UL94HB
- temperaturbeständig bis ca. +110 °C
- Farbe: schwarz

### Abmessungen

► Einheit = mm

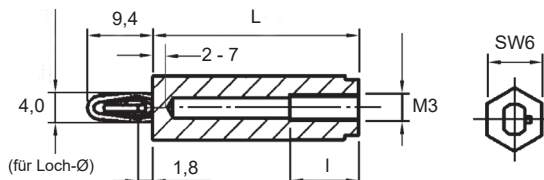

Art.-Nr.	L (mm)
100 36 05	5,0
100 36 06	6,0
100 36 07	7,0
100 36 08	8,0
100 36 09	9,0
100 36 10	10,0
100 36 11	11,0
100 36 12	12,0
100 36 13	13,0
100 36 14	14,0
100 36 15	15,0
100 36 16	16,0
100 36 17	17,0
100 36 18	18,0
100 36 19	19,0
100 36 20	20,0
100 36 21	21,0
100 36 22	22,0
100 36 23	23,0
100 36 24	24,0
100 36 25	25,0
100 36 26	26,0
100 36 27	27,0
100 36 28	28,0
100 36 29	29,0
100 36 30	30,0
100 36 31	31,0
100 36 32	32,0
100 36 33	33,0

Art.-Nr.	L (mm)
100 36 34	34,0
100 36 35	35,0
100 36 36	36,0
100 36 37	37,0
100 36 38	38,0
100 36 39	39,0
100 36 40	40,0
100 36 41	41,0
100 36 42	42,0
100 36 43	43,0
100 36 44	44,0
100 36 45	45,0
100 36 46	46,0
100 36 47	47,0
100 36 48	48,0
100 36 49	49,0
100 36 50	50,0
100 36 51	51,0
100 36 52	52,0
100 36 53	53,0
100 36 54	54,0
100 36 55	55,0
100 36 56	56,0
100 36 57	57,0
100 36 58	58,0
100 36 59	59,0
100 36 60	60,0
100 36 61	61,0

L		I		L		L		I	
6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe
5,0 mm	3,0 mm	8,0 mm	6,0 mm	11,0 mm	9,0 mm				
6,0 mm	4,0 mm	9,0 mm	7,0 mm	ab 12,0 mm	10,0 mm				
7,0 mm	5,0 mm	10,0 mm	8,0 mm						

Weitere Abmessungen und Größen auf Anfrage, Tel.: 09852 61079-0

Abstandhalter / einseitige Rast- und Schraubmontage