

## AB-IR-M3-2,1 - SW8 ABSTANDSBOLZEN




### Merkmale

- einseitig mit Innengewinde M3
- einseitig mit Rastverriegelung für Leiterplattenstärke 2,0 mm
- Loch-Ø = 4,0 mm
- Material: Polyamid 6.6, UL94V-2
- temperaturbeständig bis ca. +110 °C
- Farbe: schwarz

### Abmessungen

► Einheit = mm

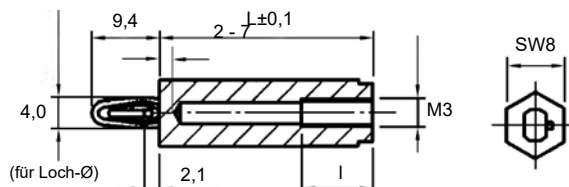

Art.-Nr.	L (mm)
100 37 05	5,0
100 37 06	6,0
100 37 07	7,0
100 37 08	8,0
100 37 09	9,0
100 37 10	10,0
100 37 11	11,0
100 37 12	12,0
100 37 13	13,0
100 37 14	14,0
100 37 15	15,0
100 37 16	16,0
100 37 17	17,0
100 37 18	18,0
100 37 19	19,0
100 37 20	20,0
100 37 21	21,0
100 37 22	22,0
100 37 23	23,0
100 37 24	24,0
100 37 25	25,0
100 37 26	26,0
100 37 27	27,0
100 37 28	28,0
100 37 29	29,0
100 37 30	30,0
100 37 31	31,0
100 37 32	32,0
100 37 33	33,0

Art.-Nr.	L (mm)
100 37 34	34,0
100 37 35	35,0
100 37 36	36,0
100 37 37	37,0
100 37 38	38,0
100 37 39	39,0
100 37 40	40,0
100 37 41	41,0
100 37 42	42,0
100 37 43	43,0
100 37 44	44,0
100 37 45	45,0
100 37 46	46,0
100 37 47	47,0
100 37 48	48,0
100 37 49	49,0
100 37 50	50,0
100 37 51	51,0
100 37 52	52,0
100 37 53	53,0
100 37 54	54,0
100 37 55	55,0
100 37 56	56,0
100 37 57	57,0
100 37 58	58,0
100 37 59	59,0
100 37 60	60,0
100 37 61	61,0

L 6-kt-Länge		I Innengewindetiefe		L 6-kt-Länge		I Innengewindetiefe	
5,0 mm	3,0 mm	8,0 mm	6,0 mm	11,0 mm	9,0 mm		
6,0 mm	4,0 mm	9,0 mm	7,0 mm	ab 12,0 mm	10,0 mm		
7,0 mm	5,0 mm	10,0 mm	8,0 mm				

Weitere Abmessungen und Größen auf Anfrage, Tel.: 09852 61079-0