

AB-IR-M4-2,1 - SW8 Abstandsbolzen




Merkmale

- einseitig mit Innengewinde M4
- einseitig mit Rastverriegelung für Leiterplattenstärke 2,0 mm
- Loch-Ø = 4,0 mm
- Material: Polyamid 6.6, UL94HB
- temperaturbeständig bis ca. +110 °C
- Farbe: schwarz

Abmessungen

► Einheit = mm

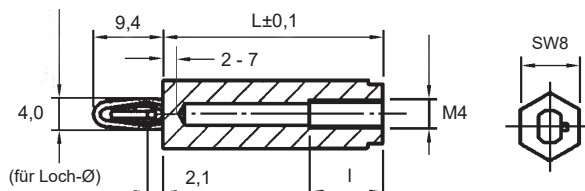

Art.-Nr.	L (mm)
100 38 05	5,0
100 38 06	6,0
100 38 07	7,0
100 38 08	8,0
100 38 09	9,0
100 38 10	10,0
100 38 11	11,0
100 38 12	12,0
100 38 13	13,0
100 38 14	14,0
100 38 15	15,0
100 38 16	16,0
100 38 17	17,0
100 38 18	18,0
100 38 19	19,0
100 38 20	20,0
100 38 21	21,0
100 38 22	22,0
100 38 23	23,0
100 38 24	24,0
100 38 25	25,0
100 38 26	26,0
100 38 27	27,0
100 38 28	28,0
100 38 29	29,0
100 38 30	30,0
100 38 31	31,0
100 38 32	32,0
100 38 33	33,0

Art.-Nr.	L (mm)
100 38 34	34,0
100 38 35	35,0
100 38 36	36,0
100 38 37	37,0
100 38 38	38,0
100 38 39	39,0
100 38 40	40,0
100 38 41	41,0
100 38 42	42,0
100 38 43	43,0
100 38 44	44,0
100 38 45	45,0
100 38 46	46,0
100 38 47	47,0
100 38 48	48,0
100 38 49	49,0
100 38 50	50,0
100 38 51	51,0
100 38 52	52,0
100 38 53	53,0
100 38 54	54,0
100 38 55	55,0
100 38 56	56,0
100 38 57	57,0
100 38 58	58,0
100 38 59	59,0
100 38 60	60,0
100 38 61	61,0

L		I		L		L	
6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe
5,0 mm	3,0 mm	8,0 mm	6,0 mm	11,0 mm	9,0 mm		
6,0 mm	4,0 mm	9,0 mm	7,0 mm	ab 12,0 mm	10,0 mm		
7,0 mm	5,0 mm	10,0 mm	8,0 mm				

Weitere Abmessungen und Größen auf Anfrage, Tel.: 09852 61079-0