

# AB-SR-2,1 - SW8 Abstandsbolzen




### Merkmale

- einseitig mit Sackloch  $\varnothing$  2,9 mm
- einseitig mit Rastverriegelung für Leiterplattenstärke 2,0 mm
- Loch- $\varnothing$  = 4,0 mm
- Material: Polyamid 6.6, UL94HB
- temperaturbeständig bis ca. +110°C
- Farbe: schwarz

### Abmessungen

► Einheit = mm

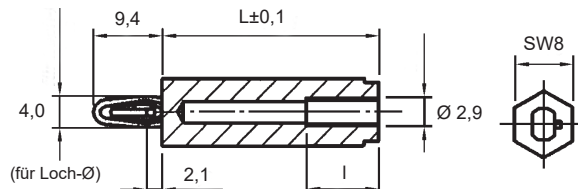

Art.-Nr.	L (mm)
100 39 04	4,0
100 39 05	5,0
100 39 06	6,0
100 39 07	7,0
100 39 08	8,0
100 39 09	9,0
100 39 10	10,0
100 39 11	11,0
100 39 12	12,0
100 39 13	13,0
100 39 14	14,0
100 39 15	15,0
100 39 16	16,0
100 39 17	17,0
100 39 18	18,0
100 39 19	19,0
100 39 20	20,0
100 39 21	21,0
100 39 22	22,0
100 39 23	23,0
100 39 24	24,0
100 39 25	25,0
100 39 26	26,0
100 39 27	27,0
100 39 28	28,0
100 39 29	29,0
100 39 30	30,0
100 39 31	31,0
100 39 32	32,0

Art.-Nr.	L (mm)
100 39 33	33,0
100 39 34	34,0
100 39 35	35,0
100 39 36	36,0
100 39 37	37,0
100 39 38	38,0
100 39 39	39,0
100 39 40	40,0
100 39 41	41,0
100 39 42	42,0
100 39 43	43,0
100 39 44	44,0
100 39 45	45,0
100 39 46	46,0
100 39 47	47,0
100 39 48	48,0
100 39 49	49,0
100 39 50	50,0
100 39 51	51,0
100 39 52	52,0
100 39 53	53,0
100 39 54	54,0
100 39 55	55,0
100 39 56	56,0
100 39 57	57,0
100 39 58	58,0
100 39 59	59,0
100 39 60	60,0
100 39 61	61,0



L	I	L	I	L	I
6-kt-Länge	Sacklochtiefe	6-kt-Länge	Sacklochtiefe	6-kt-Länge	Sacklochtiefe
4,0 mm	3,0 mm	7,0 mm	5,0 mm	10,0 mm	8,0 mm
5,0 mm	3,0 mm	8,0 mm	6,0 mm	11,0 mm	9,0 mm
6,0 mm	4,0 mm	9,0 mm	7,0 mm	ab 12,0 mm	10,0 mm

Weitere Abmessungen und Größen auf Anfrage, Tel.: 09852 61079-0