

# AB-IR-M4-1,8 - SW8 Abstandsbolzen




### Merkmale

- einseitig mit Innengewinde M4
- einseitig mit Rastverriegelung für Leiterplattenstärke 1,6 mm
- Loch-Ø = 4,0 mm
- Material: Polyamid 6.6, UL94HB
- temperaturbeständig bis ca. +110 °C
- Farbe: schwarz

### Abmessungen

► Einheit = mm

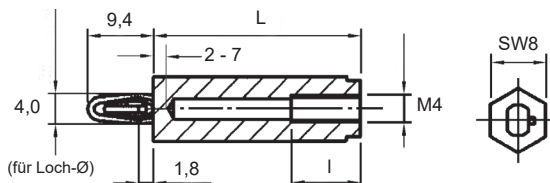

Art.-Nr.	L (mm)
100 40 05	5,0
100 40 06	6,0
100 40 07	7,0
100 40 08	8,0
100 40 09	9,0
100 40 10	10,0
100 40 11	11,0
100 40 12	12,0
100 40 13	13,0
100 40 14	14,0
100 40 15	15,0
100 40 16	16,0
100 40 17	17,0
100 40 18	18,0
100 40 19	19,0
100 40 20	20,0
100 40 21	21,0
100 40 22	22,0
100 40 23	23,0
100 40 24	24,0
100 40 25	25,0
100 40 26	26,0
100 40 27	27,0
100 40 28	28,0
100 40 29	29,0
100 40 30	30,0
100 40 31	31,0
100 40 32	32,0
100 40 33	33,0

Art.-Nr.	L (mm)
100 40 34	34,0
100 40 35	35,0
100 40 36	36,0
100 40 37	37,0
100 40 38	38,0
100 40 39	39,0
100 40 40	40,0
100 40 41	41,0
100 40 42	42,0
100 40 43	43,0
100 40 44	44,0
100 40 45	45,0
100 40 46	46,0
100 40 47	47,0
100 40 48	48,0
100 40 49	49,0
100 40 50	50,0
100 40 51	51,0
100 40 52	52,0
100 40 53	53,0
100 40 54	54,0
100 40 55	55,0
100 40 56	56,0
100 40 57	57,0
100 40 58	58,0
100 40 59	59,0
100 40 60	60,0
100 40 61	61,0

L		I		L		I	
6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe
5,0 mm	3,0 mm	8,0 mm	6,0 mm	11,0 mm	9,0 mm		
6,0 mm	4,0 mm	9,0 mm	7,0 mm	ab 12,0 mm	10,0 mm		
7,0 mm	5,0 mm	10,0 mm	8,0 mm				

Weitere Abmessungen und Größen auf Anfrage, Tel.: 09852 61079-0