

AB-IR-M3-2,1 - SW6 ABSTANDSBOLZEN




Merkmale

- einseitig mit Innengewinde M3
- einseitig mit Rastverriegelung für Leiterplattenstärke 2,0 mm
- Loch- \varnothing = 4,0 mm
- Material: Polyamid 6.6, UL94V-2
- temperaturbeständig bis ca. +110 °C
- Farbe: schwarz

Abmessungen

► Einheit = mm

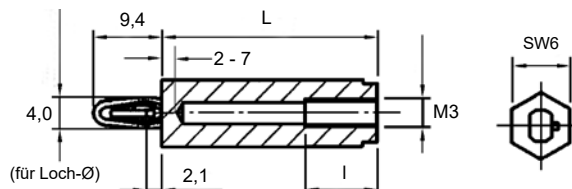

Art.-Nr.	L (mm)
100 41 05	5,0
100 41 06	6,0
100 41 07	7,0
100 41 08	8,0
100 41 09	9,0
100 41 10	10,0
100 41 11	11,0
100 41 12	12,0
100 41 13	13,0
100 41 14	14,0
100 41 15	15,0
100 41 16	16,0
100 41 17	17,0
100 41 18	18,0
100 41 19	19,0
100 41 20	20,0
100 41 21	21,0
100 41 22	22,0
100 41 23	23,0
100 41 24	24,0
100 41 25	25,0
100 41 26	26,0
100 41 27	27,0
100 41 28	28,0
100 41 29	29,0
100 41 30	30,0
100 41 31	31,0
100 41 32	32,0
100 41 33	33,0

Art.-Nr.	L (mm)
100 41 34	34,0
100 41 35	35,0
100 41 36	36,0
100 41 37	37,0
100 41 38	38,0
100 41 39	39,0
100 41 40	40,0
100 41 41	41,0
100 41 42	42,0
100 41 43	43,0
100 41 44	44,0
100 41 45	45,0
100 41 46	46,0
100 41 47	47,0
100 41 48	48,0
100 41 49	49,0
100 41 50	50,0
100 41 51	51,0
100 41 52	52,0
100 41 53	53,0
100 41 54	54,0
100 41 55	55,0
100 41 56	56,0
100 41 57	57,0
100 41 58	58,0
100 41 59	59,0
100 41 60	60,0
100 41 61	61,0



L		I		L		I	
6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe
5,0 mm	3,0 mm	8,0 mm	6,0 mm	11,0 mm	9,0 mm		
6,0 mm	4,0 mm	9,0 mm	7,0 mm	ab 12,0 mm	10,0 mm		
7,0 mm	5,0 mm	10,0 mm	8,0 mm				

Weitere Abmessungen und Größen auf Anfrage, Tel.: 09852 61079-0

