

AB-IR-M3-1,8 - SW8 ABSTANDSBOLZEN




Merkmale

- einseitig mit Innengewinde M3
- einseitig mit Rastverriegelung für Leiterplattenstärke 1,6 mm
- Loch-Ø = 4,0 mm
- Material: Polyamid 6.6, UL94V-2
- temperaturbeständig bis ca. +110 °C
- Farbe: schwarz

Abmessungen

► Einheit = mm

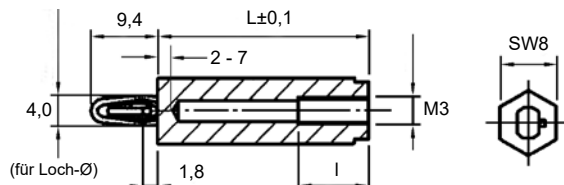

Art.-Nr.	L (mm)
100 42 04	4,0
100 42 05	5,0
100 42 06	6,0
100 42 07	7,0
100 42 08	8,0
100 42 09	9,0
100 42 10	10,0
100 42 11	11,0
100 42 12	12,0
100 42 13	13,0
100 42 14	14,0
100 42 15	15,0
100 42 16	16,0
100 42 17	17,0
100 42 18	18,0
100 42 19	19,0
100 42 20	20,0
100 42 21	21,0
100 42 22	22,0
100 42 23	23,0
100 42 24	24,0
100 42 25	25,0
100 42 26	26,0
100 42 27	27,0
100 42 28	28,0
100 42 29	29,0
100 42 30	30,0
100 42 31	31,0
100 42 32	32,0

Art.-Nr.	L (mm)
100 42 33	33,0
100 42 34	34,0
100 42 35	35,0
100 42 36	36,0
100 42 37	37,0
100 42 38	38,0
100 42 39	39,0
100 42 40	40,0
100 42 41	41,0
100 42 42	42,0
100 42 43	43,0
100 42 44	44,0
100 42 45	45,0
100 42 46	46,0
100 42 47	47,0
100 42 48	48,0
100 42 49	49,0
100 42 50	50,0
100 42 51	51,0
100 42 52	52,0
100 42 53	53,0
100 42 54	54,0
100 42 55	55,0
100 42 56	56,0
100 42 57	57,0
100 42 58	58,0
100 42 59	59,0
100 42 60	60,0
100 42 61	61,0



L 6-kt-Länge		I Innengewindetiefe		L 6-kt-Länge		I Innengewindetiefe	
4,0 / 5,0 mm	3,0 mm	8,0 mm	6,0 mm	11,0 mm	9,0 mm		
6,0 mm	4,0 mm	9,0 mm	7,0 mm	ab 12,0 mm	10,0 mm		
7,0 mm	5,0 mm	10,0 mm	8,0 mm				

Weitere Abmessungen und Größen auf Anfrage, Tel.: 09852 61079-0

