


## AB-AR-M3-2,1 - SW8 Abstandsbolzen



### Merkmale

- einseitig mit Außengewinde M3
- einseitig mit Rastverriegelung
- für Leiterplattenstärke 2,0 mm, Loch- $\varnothing$  = 4,0 mm
- Außengewindelänge = 6,0 mm
- Material: Polyamid 6.6, UL94HB
- temperaturbeständig bis ca. +110 °C
- Farbe: schwarz

### Abmessungen ► Einheit = mm

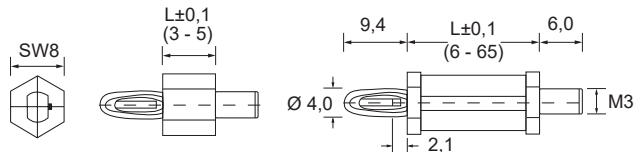

Art.-Nr.	L (mm)
100 52 03	3,0
100 52 04	4,0
100 52 05	5,0
100 52 06	6,0
100 52 07	7,0
100 52 08	8,0
100 52 09	9,0
100 52 10	10,0
100 52 11	11,0
100 52 12	12,0
100 52 13	13,0
100 52 14	14,0
100 52 15	15,0
100 52 16	16,0
100 52 17	17,0
100 52 18	18,0
100 52 19	19,0
100 52 20	20,0
100 52 21	21,0
100 52 22	22,0
100 52 23	23,0
100 52 24	24,0
100 52 25	25,0
100 52 26	26,0
100 52 27	27,0
100 52 28	28,0
100 52 29	29,0
100 52 30	30,0
100 52 31	31,0
100 52 32	32,0
100 52 33	33,0
100 52 34	34,0

Art.-Nr.	L (mm)
100 52 35	35,0
100 52 36	36,0
100 52 37	37,0
100 52 38	38,0
100 52 39	39,0
100 52 40	40,0
100 52 41	41,0
100 52 42	42,0
100 52 43	43,0
100 52 44	44,0
100 52 45	45,0
100 52 46	46,0
100 52 47	47,0
100 52 48	48,0
100 52 49	49,0
100 52 50	50,0
100 52 51	51,0
100 52 52	52,0
100 52 53	53,0
100 52 54	54,0
100 52 55	55,0
100 52 56	56,0
100 52 57	57,0
100 52 58	58,0
100 52 59	59,0
100 52 60	60,0
100 52 61	61,0
100 52 62	62,0
100 52 63	63,0
100 52 64	64,0
100 52 65	65,0

Weitere Abmessungen und Größen auf Anfrage, Tel.: 09852 61079-0

