


AB-AR-M4-2,1 - SW6 Abstandsbolzen



Merkmale

- einseitig mit Außengewinde M4
- einseitig mit Rastverriegelung
- Außengewindelänge = 6,4 mm
- für Leiterplattenstärke 2,0 mm, Loch-Ø = 4,0 mm
- Material: Polyamid 6.6, UL94HB
- temperaturbeständig bis ca. +110 °C
- Farbe: schwarz

Abmessungen ► Einheit = mm

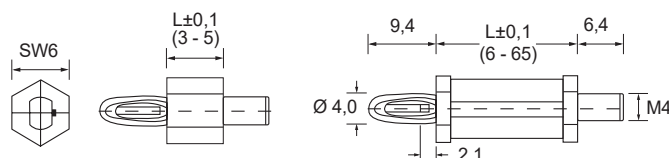

| Art.-Nr. | L (mm) |
|-----------|--------|
| 100 54 03 | 3,0 |
| 100 54 04 | 4,0 |
| 100 54 05 | 5,0 |
| 100 54 06 | 6,0 |
| 100 54 07 | 7,0 |
| 100 54 08 | 8,0 |
| 100 54 09 | 9,0 |
| 100 54 10 | 10,0 |
| 100 54 11 | 11,0 |
| 100 54 12 | 12,0 |
| 100 54 13 | 13,0 |
| 100 54 14 | 14,0 |
| 100 54 15 | 15,0 |
| 100 54 16 | 16,0 |
| 100 54 17 | 17,0 |
| 100 54 18 | 18,0 |
| 100 54 19 | 19,0 |
| 100 54 20 | 20,0 |
| 100 54 21 | 21,0 |
| 100 54 22 | 22,0 |
| 100 54 23 | 23,0 |
| 100 54 24 | 24,0 |
| 100 54 25 | 25,0 |
| 100 54 26 | 26,0 |
| 100 54 27 | 27,0 |
| 100 54 28 | 28,0 |
| 100 54 29 | 29,0 |
| 100 54 30 | 30,0 |
| 100 54 31 | 31,0 |
| 100 54 32 | 32,0 |
| 100 54 33 | 33,0 |
| 100 54 34 | 34,0 |

| Art.-Nr. | L (mm) |
|-----------|--------|
| 100 54 35 | 35,0 |
| 100 54 36 | 36,0 |
| 100 54 37 | 37,0 |
| 100 54 38 | 38,0 |
| 100 54 39 | 39,0 |
| 100 54 40 | 40,0 |
| 100 54 41 | 41,0 |
| 100 54 42 | 42,0 |
| 100 54 43 | 43,0 |
| 100 54 44 | 44,0 |
| 100 54 45 | 45,0 |
| 100 54 46 | 46,0 |
| 100 54 47 | 47,0 |
| 100 54 48 | 48,0 |
| 100 54 49 | 49,0 |
| 100 54 50 | 50,0 |
| 100 54 51 | 51,0 |
| 100 54 52 | 52,0 |
| 100 54 53 | 53,0 |
| 100 54 54 | 54,0 |
| 100 54 55 | 55,0 |
| 100 54 56 | 56,0 |
| 100 54 57 | 57,0 |
| 100 54 58 | 58,0 |
| 100 54 59 | 59,0 |
| 100 54 60 | 60,0 |
| 100 54 61 | 61,0 |
| 100 54 62 | 62,0 |
| 100 54 63 | 63,0 |
| 100 54 64 | 64,0 |
| 100 54 65 | 65,0 |

Weitere Abmessungen und Größen auf Anfrage, Tel.: 09852 61079-0

