


# ABI-S-M3-1,6 - SW6 Abstandsbolzen



## Merkmale

- einseitig mit Innengewinde M3
- einseitig mit Rastverriegelung
- für Leiterplattenstärke 1,5 mm, Loch-Ø = 4,0 mm
- Material: Polyamid 6.6, UL94HB
- temperaturbeständig bis ca. +110 °C
- Farbe: schwarz

## Abmessungen ► Einheit = mm

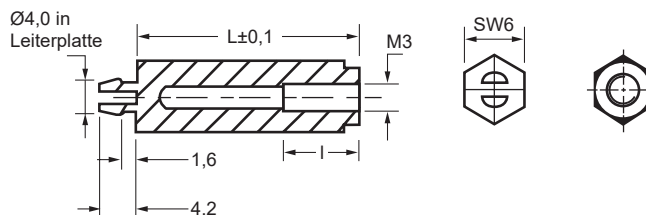

Art.-Nr.	L (mm)
100 59 05	5,0
100 59 06	6,0
100 59 07	7,0
100 59 08	8,0
100 59 09	9,0
100 59 10	10,0
100 59 11	11,0
100 59 12	12,0
100 59 13	13,0
100 59 14	14,0
100 59 15	15,0
100 59 16	16,0
100 59 17	17,0
100 59 18	18,0
100 59 19	19,0
100 59 20	20,0
100 59 21	21,0
100 59 22	22,0
100 59 23	23,0
100 59 24	24,0
100 59 25	25,0
100 59 26	26,0
100 59 27	27,0
100 59 28	28,0
100 59 29	29,0
100 59 30	30,0
100 59 31	31,0
100 59 32	32,0
100 59 33	33,0

Art.-Nr.	L (mm)
100 59 34	34,0
100 59 35	35,0
100 59 36	36,0
100 59 37	37,0
100 59 38	38,0
100 59 39	39,0
100 59 40	40,0
100 59 41	41,0
100 59 42	42,0
100 59 43	43,0
100 59 44	44,0
100 59 45	45,0
100 59 46	46,0
100 59 47	47,0
100 59 48	48,0
100 59 49	49,0
100 59 50	50,0
100 59 51	51,0
100 59 52	52,0
100 59 53	53,0
100 59 54	54,0
100 59 55	55,0
100 59 56	56,0
100 59 57	57,0
100 59 58	58,0
100 59 59	59,0
100 59 60	60,0
100 59 61	61,0



L	I	L	I	L	I
6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe
5,0 mm	3,0 mm	8,0 mm	6,0 mm	11,0 mm	9,0 mm
6,0 mm	4,0 mm	9,0 mm	7,0 mm	ab 12,0 mm	10,0 mm
7,0 mm	5,0 mm	10,0 mm	8,0 mm		

Weitere Abmessungen und Ausführungen auf Anfrage, Tel.: 09852 61079-0

