

ABI-S-M2,5-1,6 - SW6 Abstandsbolzen




Merkmale

- einseitig mit Innengewinde M2,5
- einseitig mit Rastverriegelung
- für Leiterplattenstärke 1,5mm, Loch-Ø = 4,0 mm
- Material: Polyamid 6.6, UL94HB
- temperaturbeständig bis ca. +110 °C
- Farbe: schwarz

Abmessungen

► Einheit = mm

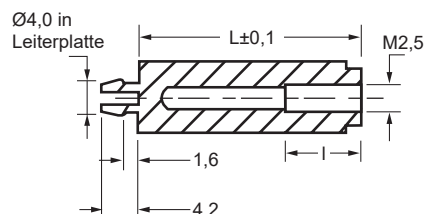

Art.-Nr.	L (mm)
100 65 04	4,0
100 65 05	5,0
100 65 06	6,0
100 65 07	7,0
100 65 08	8,0
100 65 09	9,0
100 65 10	10,0
100 65 11	11,0
100 65 12	12,0
100 65 13	13,0
100 65 14	14,0
100 65 15	15,0
100 65 16	16,0
100 65 17	17,0
100 65 18	18,0
100 65 19	19,0
100 65 20	20,0
100 65 21	21,0
100 65 22	22,0
100 65 23	23,0
100 65 24	24,0
100 65 25	25,0
100 65 26	26,0
100 65 27	27,0
100 65 28	28,0
100 65 29	29,0
100 65 30	30,0
100 65 31	31,0
100 65 32	32,0
100 65 33	33,0

Art.-Nr.	L (mm)
100 65 34	34,0
100 65 35	35,0
100 65 36	36,0
100 65 37	37,0
100 65 38	38,0
100 65 39	39,0
100 65 40	40,0
100 65 41	41,0
100 65 42	42,0
100 65 43	43,0
100 65 44	44,0
100 65 45	45,0
100 65 46	46,0
100 65 47	47,0
100 65 48	48,0
100 65 49	49,0
100 65 50	50,0
100 65 51	51,0
100 65 52	52,0
100 65 53	53,0
100 65 54	54,0
100 65 55	55,0
100 65 56	56,0
100 65 57	57,0
100 65 58	58,0
100 65 59	59,0
100 65 60	60,0



L		I		L		I	
6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe	6-kt-Länge	Innengewindetiefe
4,0 mm	2,5 mm	7,0 mm	5,0 mm	10,0 mm	8,0 mm		
5,0 mm	3,5 mm	8,0 mm	6,0 mm	11,0 mm	9,0 mm		
6,0 mm	4,0 mm	9,0 mm	7,0 mm	ab 12,0 mm	10,0 mm		

Weitere Abmessungen und Ausführungen auf Anfrage, Tel.: 09852 61079-0