


RP Flachbandkabel ferrit




Merkmale


- geschlossene Ausführung mit großem Volumen, dadurch besonders hohe Schirmdämpfungswerte

Abmessungen ► Einheit = mm

Figur 1

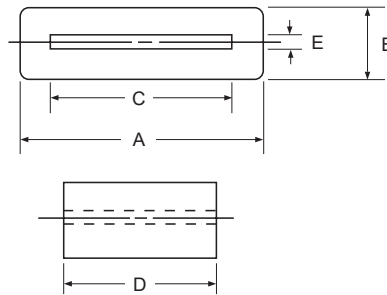

Figur 2









Figur 1

| Art.-Nr. | Typ | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | Impedanz Ω | | max. Polzahl |
|-----------|-------------------|--------|--------|--------|--------|--------|-------------------|---------|--------------|
| | | | | | | | 25 MHz | 100 MHz | |
| 601 02 65 | RP-22,3x7,7x19 | 22,3 | 7,7 | 14,0 | 19,0 | 1,5 | 68 | 120 | 11 |
| 601 02 64 | RP-21x6,8x15 | 21,0 | 6,8 | 15,0 | 15,0 | 1,3 | 60 | 75 | 11 |
| 601 02 60 | RP-23,5x6,3x10 | 23,5 | 6,3 | 18,4 | 10,0 | 1,1 | 32 | 75 | 14 |
| 601 02 62 | RP-45,1x12,5x28,6 | 45,1 | 12,5 | 34,5 | 28,6 | 1,5 | 80 | 165 | 27 |

Figur 2

| Art.-Nr. | Typ | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | Impedanz Ω | | max. Polzahl |
|-----------|----------------|--------|--------|--------|--------|--------|-------------------|---------|--------------|
| | | | | | | | 25 MHz | 100 MHz | |
| 601 02 59 | RP-28x7,7x14,6 | 28,0 | 7,7 | 23,0 | 14,6 | 1,4 | 38 | 85 | 18 |
| 601 02 67 | RP-28x7,7x22 | 28,0 | 7,7 | 23,0 | 22,0 | 1,4 | 52 | 110 | 18 |

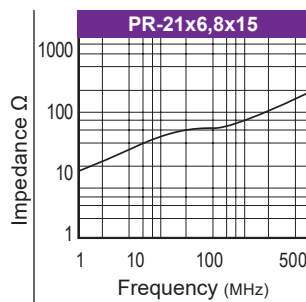

! Ausführliche Datenblätter auf Anfrage, Tel.: 09852 61079-0