

FPC Ferrit für flexible Leiterbahnen




Merkmale


- speziell für flexible Leiterbahnen geeignet

Abmessungen ► Einheit = mm







Figur 1



Figur 2

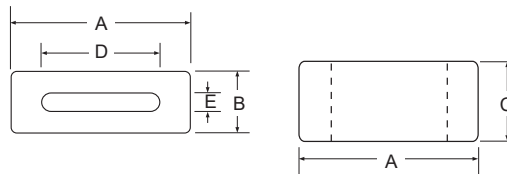

Art.-Nr.	Typ	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Impedanz Ω		Figur
							25 MHz	100 MHz	
601 04 08	FPC-16-8	16,0	5,0	8,0	11,5	0,5	29	72	1
601 04 16	FPC-16-12	16,0	5,0	12,0	11,5	0,5	42	79	
601 04 15	FPC-16-15	16,0	5,0	15,0	11,5	0,5	50	110	
601 04 17	FPC-16-20	16,0	5,0	20,0	11,5	0,5	71	127	
601 04 21	FPC-21-15	20,5	3,5	15,0	16,5	0,5	34	88	2
601 04 27	FPC-23-7	23,3	3,0	7,0	20,0	0,9	20	60	
601 04 24	FPC-25-12	24,5	5,0	12,0	20,0	0,5	30	65	1
601 04 20	FPC-25-20	24,5	5,0	20,0	20,0	0,5	50	103	
601 04 31	FPC-25-10-3	25,0	3,0	10,0	21,0	0,8	18	39	2
601 04 30	FPC-28-18	28,5	6,5	18,0	23,5	1,0	40	95	
601 04 34	FPC-31-8	31,0	5,0	8,0	27,0	0,5	21	60	1
601 04 35	FPC-31-9	31,0	5,0	9,0	27,0	0,5	25	75	
601 04 56	FPC-31-12-3	30,5	3,0	12,0	27,2	0,7	17	42	
601 04 25	FPC-31-12	31,0	5,0	12,0	27,0	0,5	26	66	
601 04 46	FPC-46-12	46,0	5,0	12,0	41,5	0,5	23	65	

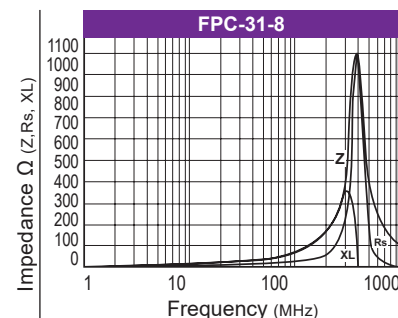

Ausführliche Datenblätter auf Anfrage, Tel.: 09852 61079-0



THORA
elektronik

www.thora.com